

SPECIFICATION

Received/Approved by

SCANTECH ID®
CHAMPTEK Group

Web: <http://scantech-id.com>
E-mail: sales@scantech-id.com

SCANTECH ID
Heliumweg 34a 3812 RE Amersfoort,
The Netherlands

TEL: +31 (0) 33 4698400
FAX: +31 (0) 33 4650615

Revision History

Version	Date	Context
V00	2013.07.01	Release for Mass production
V01	2015.12.15	Add IP42 description
V02	2018.02.23	Performance update

TABLE OF CONTENTS

A.	General Description	4
B.	Physical Characteristics	5
C.	Electrical Characteristics.....	10
D.	Performance	10
E.	Environmental.....	10
F.	Readable Symbologies	11
G.	Scan Map.....	12
H.	Reliability.....	12
I.	Packing.....	13

A. General Description



SG600 is a brand new general purpose gun-type linear imager bar code scanner which is designed especially for retail, logistic and warehousing management market. We include friendly functions with replaceable multiple interface cable options that makes it more easily to be operated by the customers to accommodate itself to user environment.

SG600 has most modern design with rugged casing and supports IP42 sealing protection, with its auto-shuttle-emulation alike smart detection, offers superior decoding performance on a reading speed up to 500 scans per second and up to 500mm reading depth for the majority of 1D bar codes and GS1 DataBar™ codes. A stand option can be ordered to facilitate hand-free reading options.

With its built-in automatically turn off and sense to switch on reading, as it sense a bar code moving in front of it, can extend its lifespan.

In short, SG600 provides customer with the most cost-effective solution in the market. It is perfectly suitable and definitely the best choice for any retail and logistic environment.



B. Physical Characteristics

Weight

Body weight Approx. 110g / 3,88 oz

Material ABS / Rubber

Cable Length 5FT. (150cm)

Connector RJ 45C 10Pins


Dimension 71.13 mm W x 62.61mm H x 169.27 mm L

Color Available Black (Cap & Grip) / Dark Gray(Cap), Beige (Grip)

a. Cable drawing (Unit:mm)

(1) Keyboard


UNIT:mm

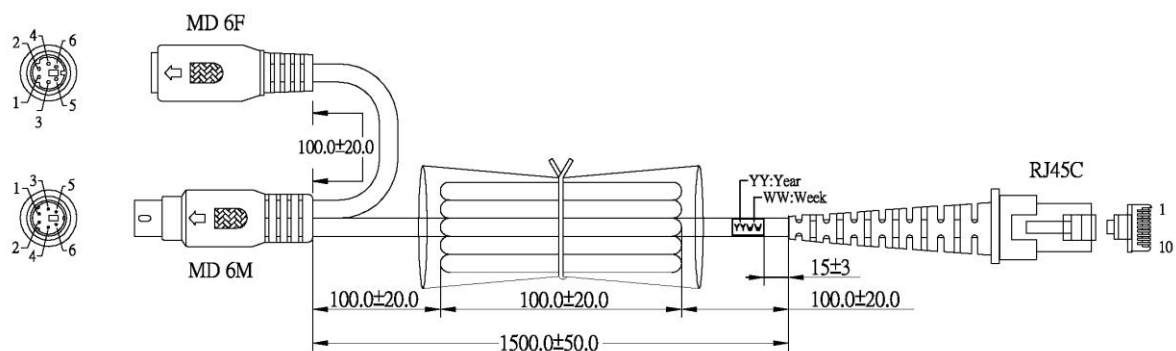

MD 6F	MD 6M	RJ45C	FUNCTION	COLOR
2	1		HOST DATA	Green
3	3	3	GND	Brown
4	5		HOST CLK	Blue
5	4	4	VCC	Red
6		5	KB CLK	Orange
8		1	KB DATA	Yellow
Spiral	Shell	Shell	SHELDING	

(2) RS232


UNIT:mm

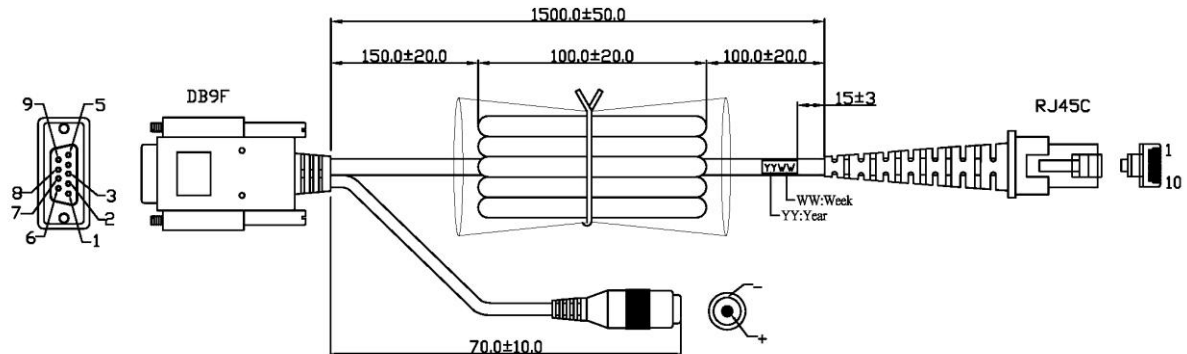

DB9F	RJ45C	DC JACK	FUNCTION	COLOR
5	3	Shell	GND	Brown
9	5	CORE	DC +5V	Red
2	7		TXD	Orange
3	9		RXD	Yellow
8	1		RTS	Green
7	10		CTS	Blue
Shell			Spiral	

(3) USB


UNIT:mm

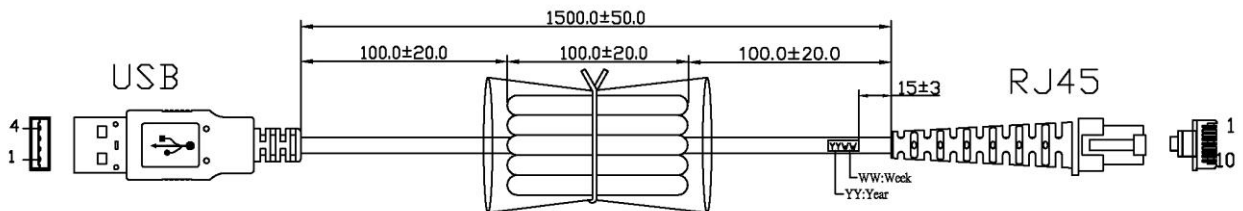


USB	RJ45	FUNCTION	COLOR
1	5	VCC	Red
2	4	D-	Blue
3	2	D+	Green
4	3	GND	Brown
Shell	3	SHIELDING	

b. Pin Assignment**(1) Keyboard Interface****DIN 5 MALE**


Pin No.	Function
1	HOST CLK
2	HOST DATA
4	GND
5	Vcc(+5V)

**DIN 5 FEMALE**


Pin No.	Function
1	KB CLK
2	KB DATA
4	GND
5	Vcc(+5V)

**MiniDIN 6 MALE**


Pin No.	Function
1	HOST DATA
3	GND
4	Vcc(+5V)
5	HOST CLK

**MiniDIN 6 FEMALE**


Pin No.	Function
1	KB DATA
3	GND
4	Vcc(+5V)
5	KB CLK

**(2) RS-232 Interface****DB 9 Female**

Pin No.	Function
2	TXD
3	RXD
5	GND
7	CTS
8	RTS
9	Vcc/+5V
Power Lead	Vcc/+5V


**(3) WAND Emulation Interface****DB 9 Female**

Pin No.	Function
2	DATA
7	GND
9	Vcc



(4) USB Interface**USB A Type Male**


Pin No.	Function
1	Vcc
2	D-
3	D+
4	GND

**Decoder Data Output**

Type RJ45 10P




Pin No. Function

1	RTS
2	HOSTDATA
3	GND
4	HOST CLK
5	Vcc (+5V)
6	KB CLK
7	TXD
8	KB DATA
9	RXD
10	CTS

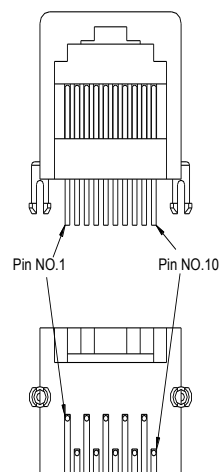

c. Mechanical drawing

Unit: mm

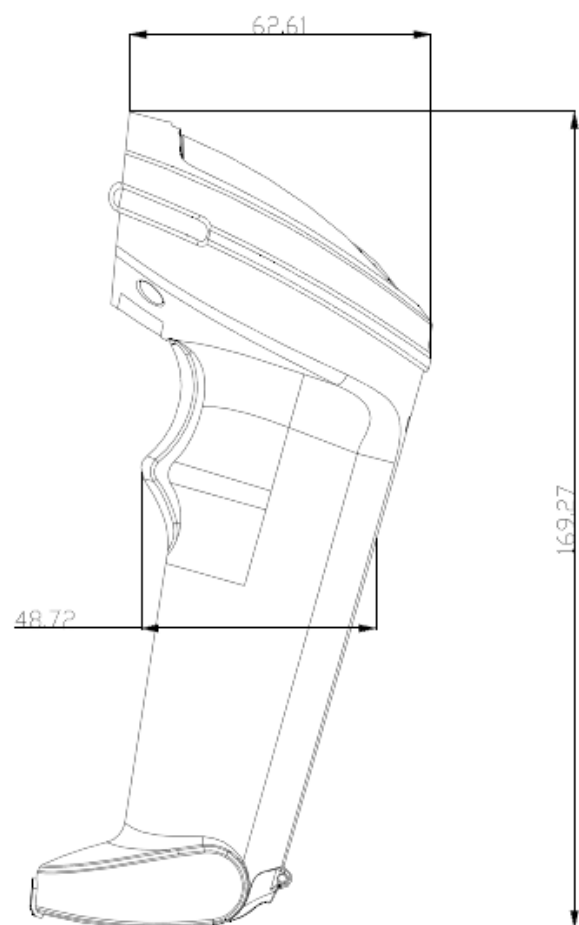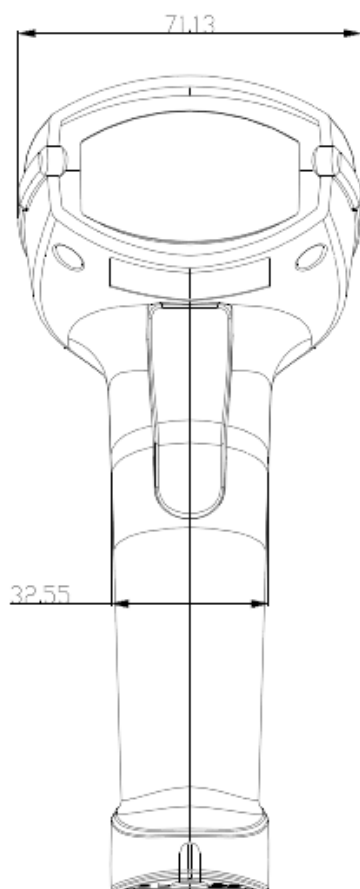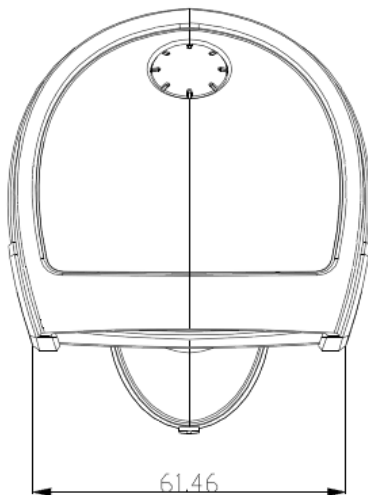

C. Electrical Characteristics

Interface	RS232	KB	USB
Supply Voltage	DC +5V $\pm$ 5%		
Output Voltage (Typ.)	$\pm$ 9V	+5V	+5V
Output low Voltage (Max.)	-	0.7V	0.4V
Current Draw			
Power On (Typ.)	170 mA	170 mA	170mA
Stand by (Typ.)	50 mA	50 mA	50 mA
Operation (Typ.)	150mA	150 mA	150 mA

D. Performance

Light Source	Visible Red light 635nm LED
Sensor	Linear CCD Sensor
Processor Type	ARM Cortex-M3,32-bit
Operating Freq.	8 MHz
Scan Speed	Smart detection, up to 500 scans per second
Reading Distance	Up to 500mm@20mil/0.5mm, PCS90%, Code39
Print Contrast Ratio(Minimum)	25%
Resolution	4mil/0.1mm@PCS90%, Code39
Indicator	Beep and LED (Good read Green)

Reading Angle	<i>Test Conditions : Code 39, 10mil/0.25mm, PCS 90%</i>
Forward & Backward(Pitch)	$\pm 10^{\circ} \sim 65^{\circ} (\pm 5^{\circ})$
Left & Right(Skew)	$\pm 60^{\circ} (\pm 5^{\circ})$
Ambient Light	100,000 Lux Max.
Sealing	Designed to IP42 water and dust protection


E. Environmental

Operating Temperature	0 °C to 50 °C (32 °F to 122 °F)
Storage Temperature	-20 °C to 70 °C (-4 °F to 158 °F)
Relative Humidity	20% to 95% (Non-condensing)

F. Readable Symbolologies

	Readable	Default Enable
All UPC/EAN/JAN	V	V
EAN128 Code	V	
Code 39	V	V
Code 39 Full ASCII	V	
Code32 / Italian Pharmacy	V	
Code 128	V	V
CODABAR/NW7	V	V
Interleave 25	V	V
Industrial 25	V	
Matrix 25	V	
MSI/PLESSEY	V	
Telepen	V	
Code 93	V	
Code 11	V	
China Postage	V	
Code 26	V	
LCD25	V	
GS1 DataBar Omnidirectional & Stacked	V	
GS1 DataBar Limited	V	
GS1 DataBar Expanded & Stacked	V	

G. Scan Map

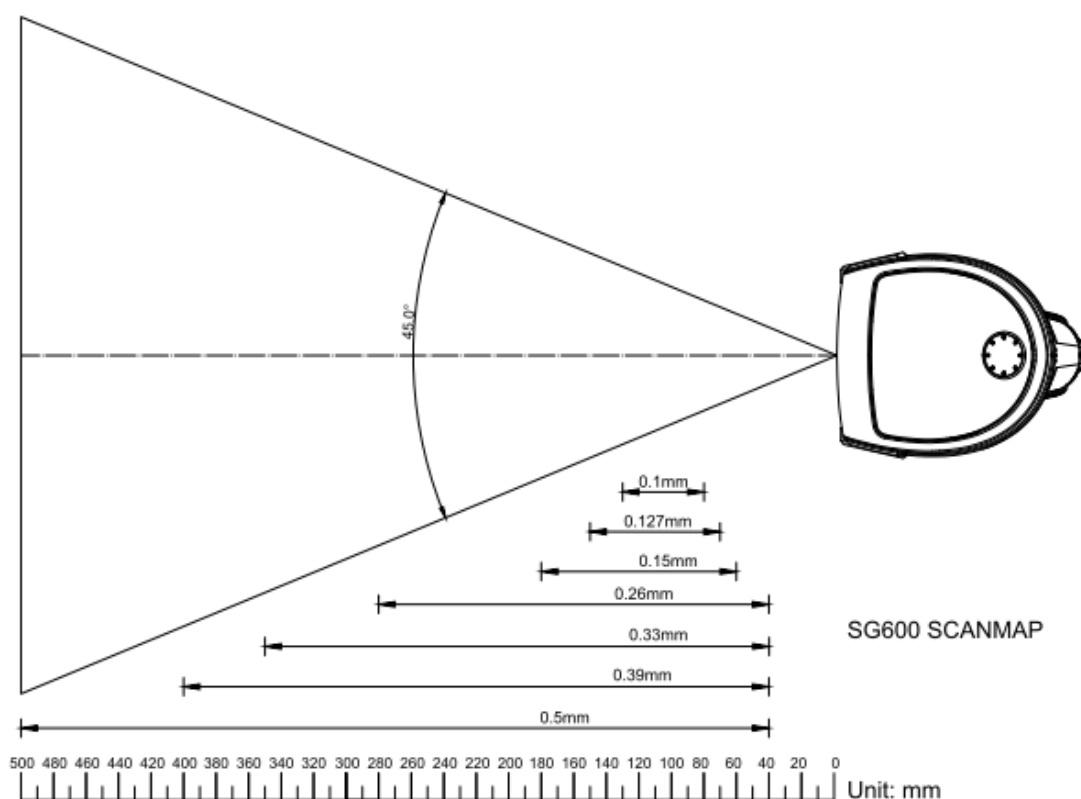

H. Reliability

Life Time

Trigger Switch	1,000,000 times
MTBF(Calculated)	50,000 hours

Thermal Shock

High Temp.	50 °C (122 °F)
Low Temp.	-20 °C (-4 °F)
Cycle time	30 minutes for high temp. , 30 minutes for low temp.
Cycles	24 cycles

Cable Bending Test

Drop resistance	25,000 times minimum (30 times/min @ 500g/90 °)
-----------------	---

I. Packing

Dimension

Unit	24 cm X 10.9 cm X 8.6 cm
Carton	57 cm X 37.5 cm X 26.5 cm


Weight

Unit	345 g
Carton	8 Kg (Q'ty :20 pcs)

Storage

Temperature	-20 °C to 60 °C (-4 °F to 140 °F)
Humidity	20% to 95% (Non-condensing)

Unit :

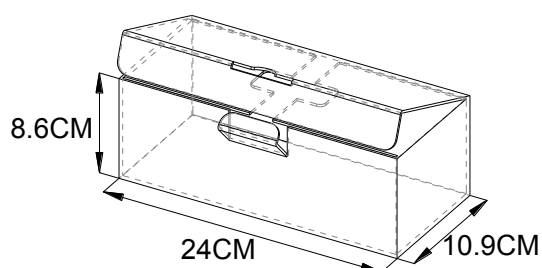

Carton:

