Quick Guide for CipherLab DemoApps


Powered by Kalipso

Table of Content

I. Launch DemoApps 1
II. Demo Applications 2
A. Inventory 2
B. Order Entry 4
C. Proof of Delivery 7
III. Demo Preparation 9
A. Device Install 9
B. PC Client Install 9

Launch DemoApps (Kalipso Client)

1. Navigate to DemoApps and double click on it
   CipherLab -> DemoApps or Start -> DemoApps

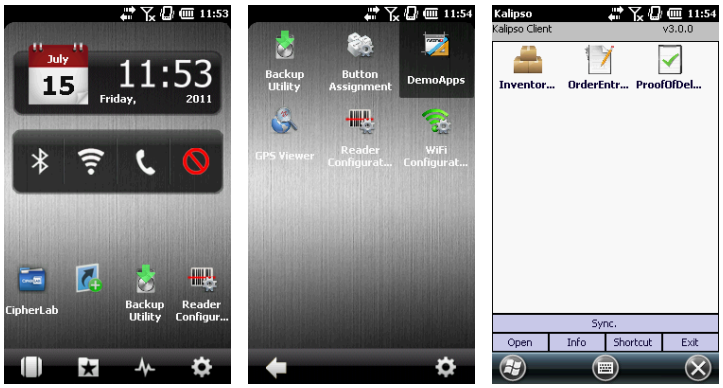


2. Double click on one of the three demos to start; press “Exit” to quit


Demo Applications

A. Inventory

1. Launch “Inventory_Demo” from Kalipso Client

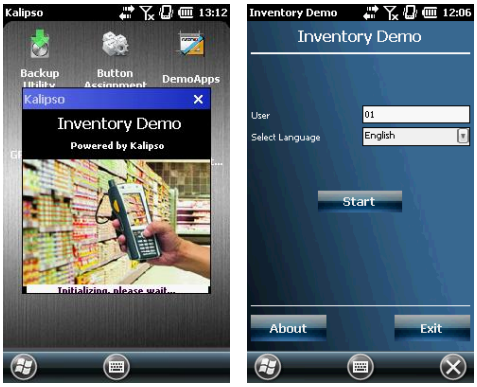

2. Login with user “01”, and press “Start”
3. Press “Data collection” to start collecting inventory data

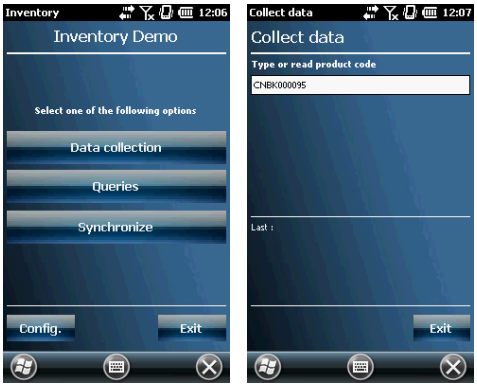


TIPS:
Run ScanEmul and prepare dummy barcodes to demo data entry from scanner

(In Config, it is set to collect only product barcode with quantity of 1 for each scan/input)

(1) You could either type or scan product barcodes continuously

(2) When finished, press “Exit” to menu

4. Go to “Queries” -> “Inventory” to browse data collected, press “Exit” to menu

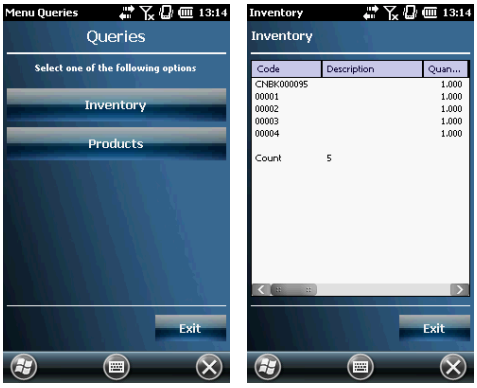


5. To demonstrate synchronization between device and PC, you will need to follow the instruction (Chapter III) to install Kalipso MIS Communicator and make sure the ActiveSync is connected and working

(1) Go to “C:\DemoApps” on your PC


(2) On your PC, execute “MISComm”, and press “Start” waiting for incoming

connection…

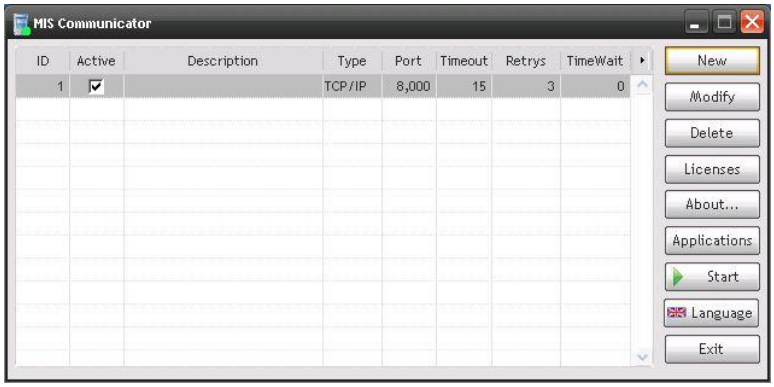




(3) On the device, go to “Synchronize”, as soon as you pressed “Send collected data”, the collected data will be transferred to PC under “C:\DemoApps\Inventory_In” folder (data on device will be deleted)

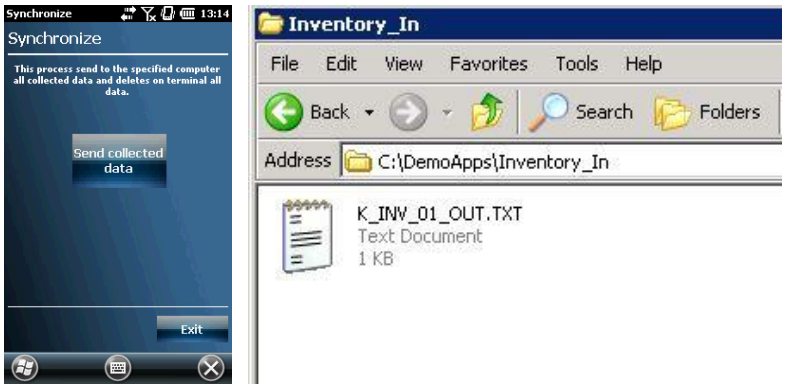


(4) The raw data will look like this

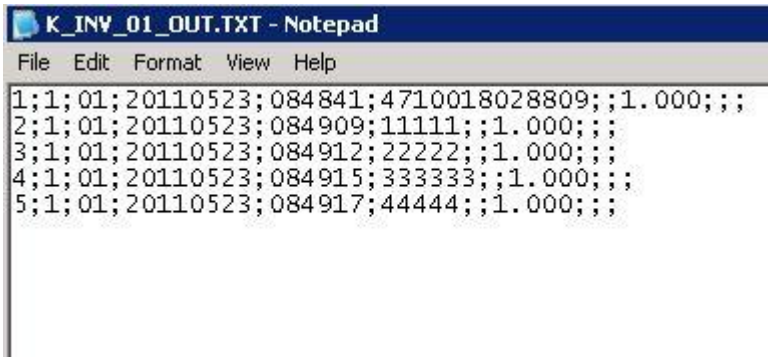


B. Order Entry

1. Launch “OrderEntry_Demo” from Kalipso Client

   (“License not found, switch to demo mode.” is a licensing feature demo, press “ok”)

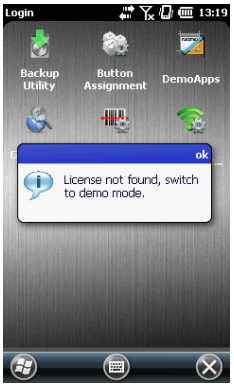


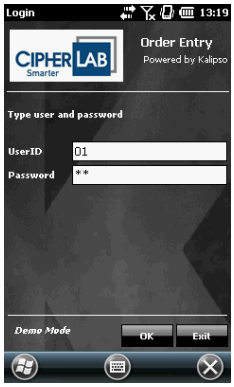



2. Login with UserID: 01, Password: 01, then press “OK”

   (1) Press “Customers” to View, New, Modify, or Delete customer data

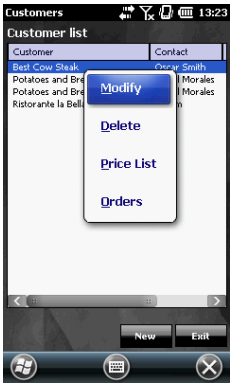




TIPS:

Double click on the input field will bring up appropriate keypad for data entry

   (2) Press “Products” to View products in different categories

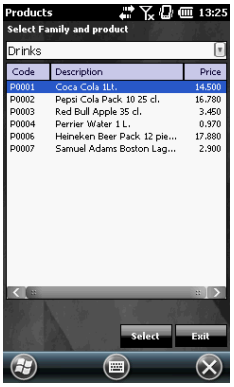



   (3) Press “Orders” to View, New, Modify, or Delete order entries

3. To place a new order:

   (1) “New” -> Pick a customer and “Select” ->





(2) Add new lines by selecting products either by “Catelog” or from “Product List” -> Give a quantity of “10” -> “OK” ->







(3) Press “Finish order” -> Sign on the screen -> Press “Save” –> Press “Yes” to create order ->








(4) You may choose to send the order to an email address, but more settings are required

4. To demonstrate synchronization between device and PC, you will need to follow the instruction (Chapter III) to install Kalipso MIS Communicator and make sure the ActiveSync is connected and working
   (1) Go to “C:\DemoApps” on your PC
   (2) On your PC, execute “MISComm”, and press “Start” waiting for incoming connection…

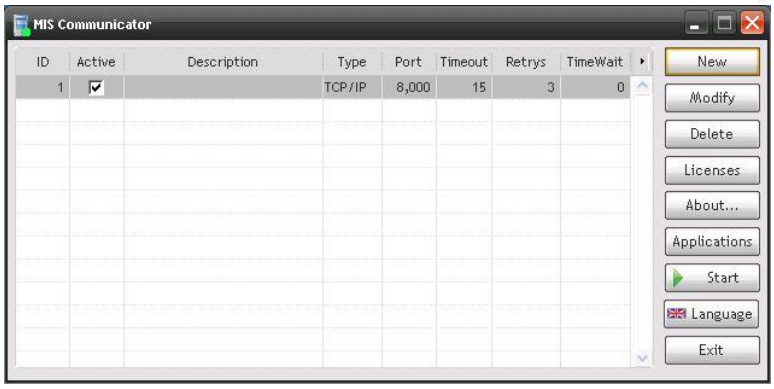




(3) On the device, go to “Synchro.” -> Tick on “Send files”, as soon as you pressed “Synchronize”, the collected data will be transferred to PC under “C:\DemoApps\OrderEntry_In\T007\” folder (data on device will be kept)



(4) The raw data will look like this

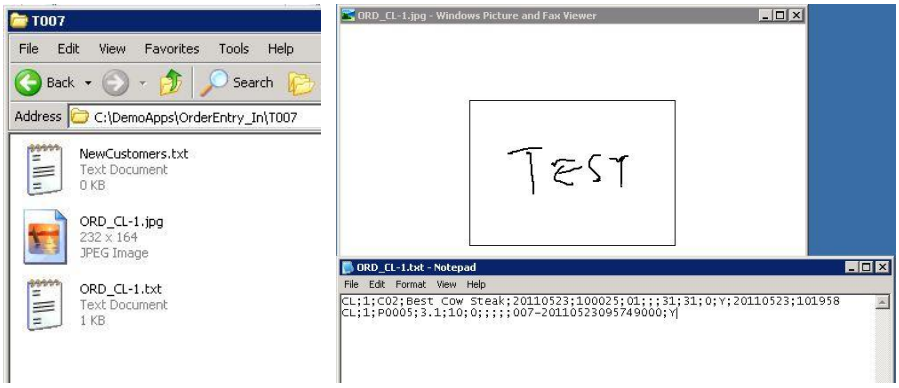


C. Proof of Delivery

1. Launch “ProofOfDelivery_Demo” from Kalipso Client




TIPS:
With internet access, you would be able to send delivery notice via email

2. Login with UserID: 01, Password: 01, then press “OK”
   (1) Press “Configuration” to setup mail server outgoing information
   (2) Press “Deliveries” to View and toggle Deliver, Not Deliver
   Delivery: Prompt for notes and signature
   Not Delivery: Prompt for reasons
3. To start a delivery process
   (1) Go to “Deliveries” -> Tick on an Order on list -> Select “Delivery” ->

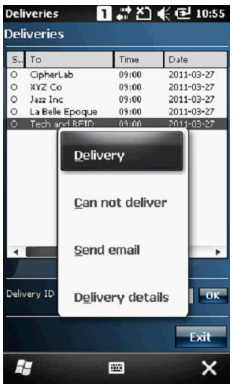

   (2) Check detail information (some fields are editable) and press “>” ->

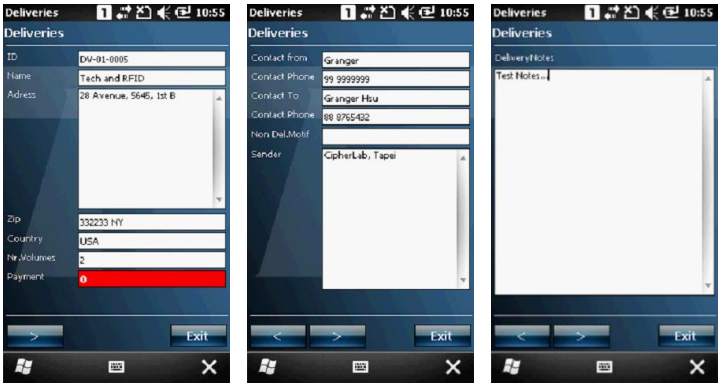


   (3) Give a signature on screen ->





(4) If you have Internet access, you may choose to send notify email

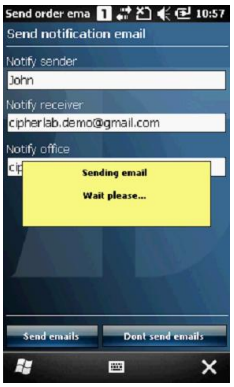

(5) When finished, the status will be updated from “O” to “D”



Demo Preparation

A. Device Install
   1. By default (after upgrade), DemoApps is pre-installed on the device
   2. If not, connect the device with ActiveSync
   3. Please take out the CD, browse to “CD\Utilities\CipherLab DemoApps”, under “CP30 Install”, copy the .CAB file to the device and install from the device
   4. Once it is completed, a “KDemo” shortcut will be created in “Start” -> “Programs”

      Note: If you receive security warning when executing the demo, please accept them all

B. PC Client Install
   1. Please take out the CD, browse to “CD\Utilities\CipherLab DemoApps”, under “PC Client Install”, execute “DemoApps_PC.exe”
   2. It will automatically extract the package and copy all necessary files to “C:\DemoApps” and create a shortcut “MISComm” to start Kalipso MIS Communicator
   3. For OrderEntry_Demo, make sure you create a folder for demo device with “T” + “Terminal ID”, for example “T007” as default, under “\OrderEntry_In\” and “OrderEntry_Out” to be able to synchronize correctly

